

Valves

Solenoid Valves

5/2-way valves




In-line valves

MH | in-line valves

MH 520 121

Solenoid valve | bistable | with manual override

HAFNER

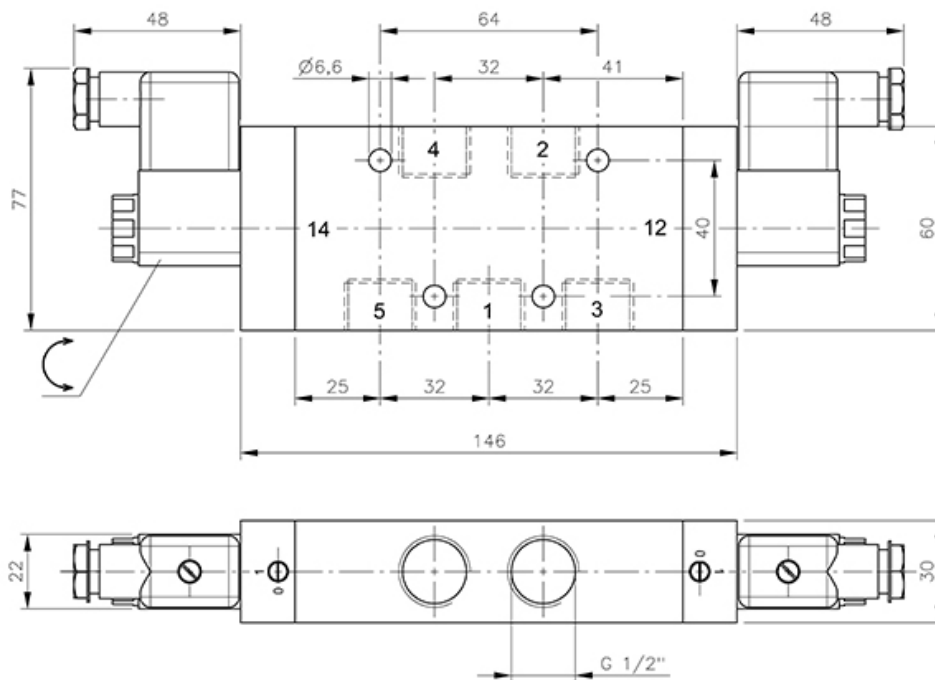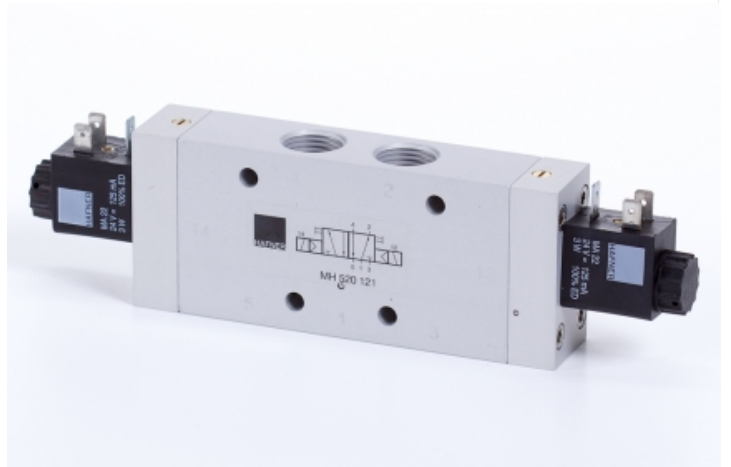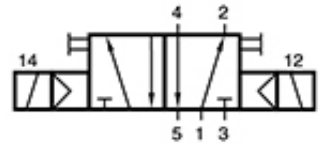

Specifications

Port size	G 1/2"
Air flow	3000 l/min
Operating pressure	1...10 bar
Funktion	Double solenoid
Power consumption	3 W / 5 VA

www.hafner-pneumatika.com