

Valves

Pneumatically Actuated Valves



5/2-way valves

G-series | In-line valves / valves for manifolds

P 520 501 G

Pilot actuated valve | bistable | G-series

HAFNER

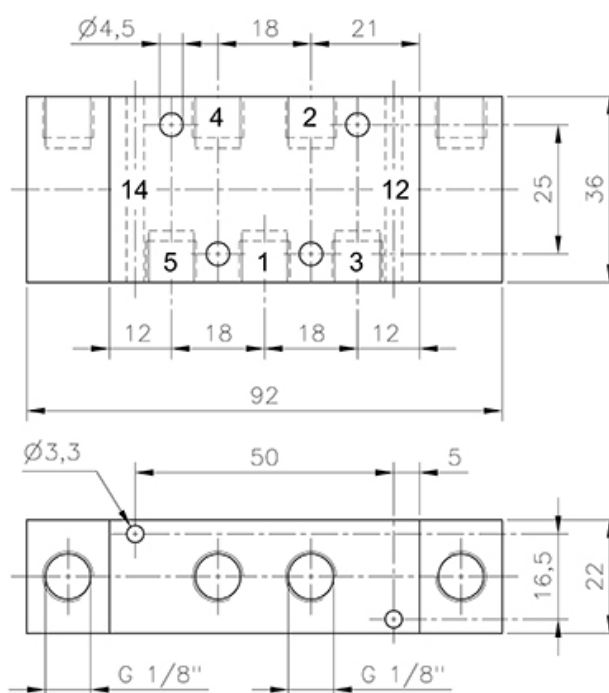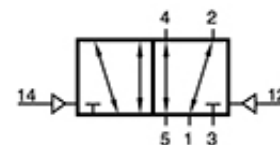

Specifications

Port size	G 1/8"
Air flow	650 l/min
Operating pressure	1...10 bar
Actuating pressure	2,5...10 bar
Size of actuation port	G 1/8"
Function	Double pilot

www.hafner-pneumatika.com